


## GaAs Schottky diode –Square shaped single TSC-SSS-06225



### Features


- ◆ Junction capacitance as low as 1fF allowing cutoff frequency >2THz
- ◆ Very low parasitic capacitance < 9fF
- ◆ Ultra low series resistance
- ◆ Airbridged anode contact for low parasitic operation
- ◆ Fully passivated by SiN
- ◆ Flip chip and beamlead geometry
- ◆ Anode metalization optimized for reliable optimization
- ◆ MMIC backend process available for integrated passives and vias
- ◆ Unique gold stand-off platforms for ruggedness in flip-chip applications

Description	Symbol	Part Number	Condition	Min	Max
Ideality	N	TSC-SSS-06225		1.1	1.2
Junction Capacitance	Cj			30 fF	30 fF
Capacitance Total	Ct			73 fF	77 fF
Series Reistance	Rs				2 ohms
Forward Voltage	VF		IF @ 1mA	0.66 V	0.75 V
Reverse Breakdown Voltage	VBr		IR @ -5uA	-5 V	
Saturation Current	Is				8e-14 A



### Product Description

- ◆ Ideality(N) is measured using  $N=1/(V_{th} \cdot \ln(10) \cdot m)$  where  $m=(0.62v)-I(0.48v)/0.62-0.48$  and  $V_{th}=K \cdot T/q$
- ◆ Is is measured using  $I_s=I(V_{_0})$
- ◆ VBr is measured at reverse bias current compliance of -5uA
- ◆ VF is measured at forward current of 1mA
- ◆ Rs is measured using  $R_s = 111.11 \cdot ((V@5mA - V@500uA) - (V@100uA - V@10uA))$
- ◆ Junction capacitance is calculated based on the device area and a fixed capacitance per unit area

### Ordering information

PART NUMBER	DESCRIPTION	CAUTION
TSC-SSS-06225	Square shaped single diode with Cj = 30 fF	DEVICE SUSCEPTIBLE TO DAMAGE BY ELECTROSTATIC DISCHARGE (ESD) 

**Schottky Diode Model:  
SSSD25**

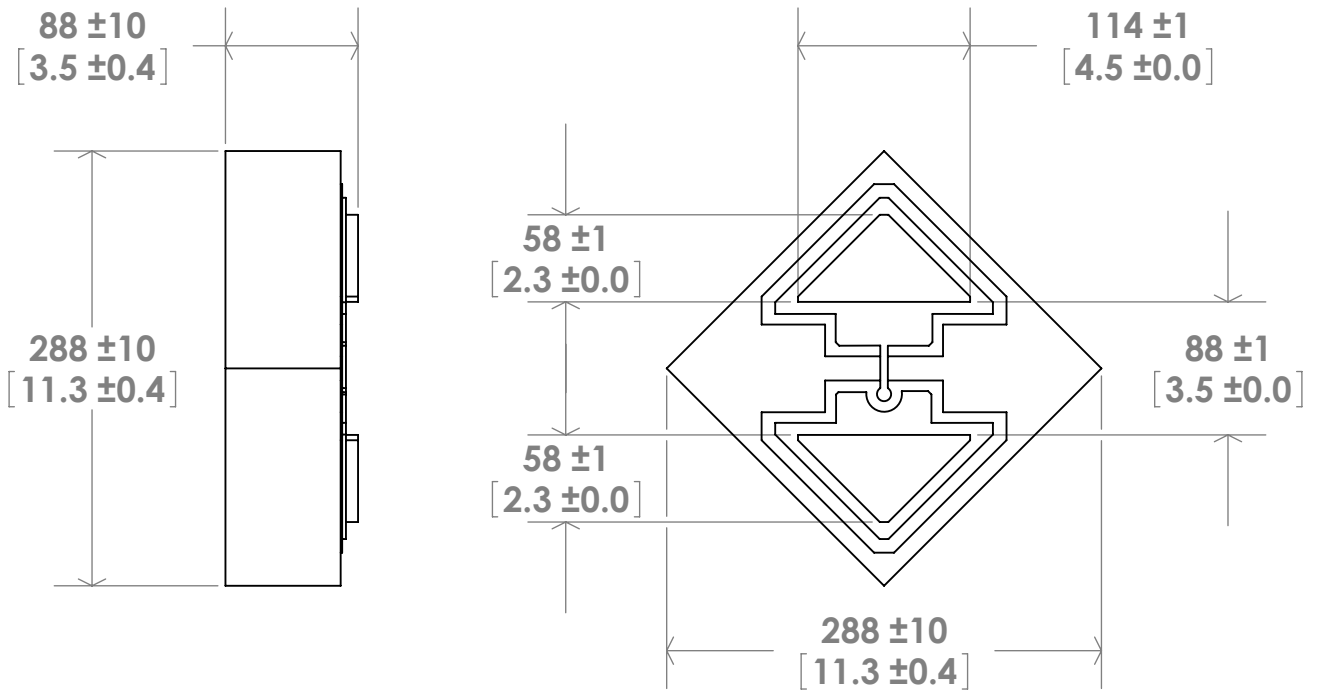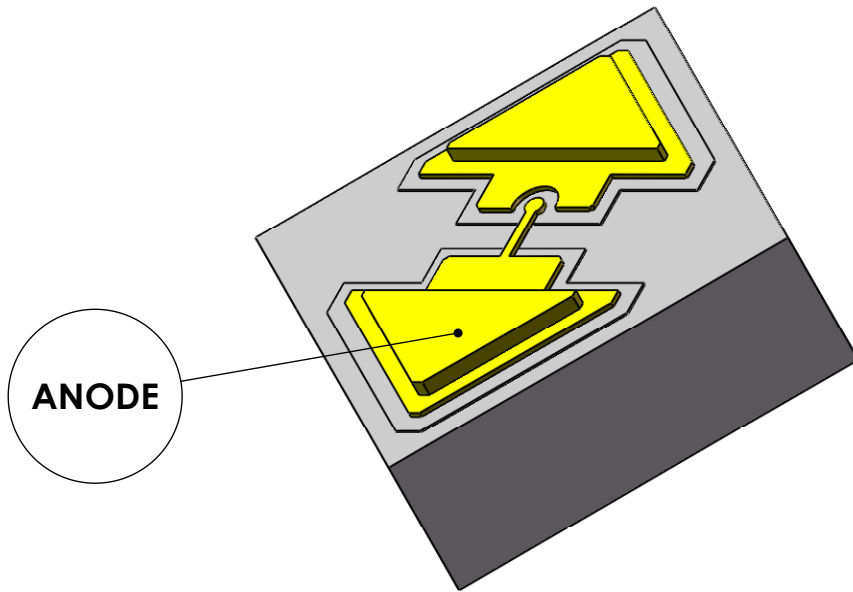

**Dimensions in microns [mils]**